

PRODUCT FEATURES

- IGBT³ CHIP(Trench+Field Stop technology)
- Low saturation voltage and positive temperature coefficient
- Fast switching and short tail current
- Free wheeling diodes with fast and soft reverse recovery
- Temperature sense included



APPLICATIONS

- AC motor control
- Motion/servo control
- Inverter and power supplies
- Photovoltaic/Fuel cell

IGBT-inverter

ABSOLUTE MAXIMUM RATINGS

T_C=25°C unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
V _{CES}	Collector Emitter Voltage	T _J =25°C	1200	V
V _{GES}	Gate Emitter Voltage		±20	
I _C	DC Collector Current	T _C =25°C	450	A
		T _C =80°C	300	
I _{CM}	Repetitive Peak Collector Current	tp=1ms	600	
P _{tot}	Power Dissipation Per IGBT		1400	W

Diode-inverter

ABSOLUTE MAXIMUM RATINGS

T_C=25°C unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
V _{RRM}	Repetitive Reverse Voltage	T _J =25°C	1200	V
I _{F(AV)}	Average Forward Current	T _C =25°C	300	A
I _{FRM}	Repetitive Peak Forward Current	tp=1ms	600	
i ² t		T _J =125°C, t=10ms, V _R =0V	17.5	KA ² S

IGBT-inverter

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit	
$V_{GE(th)}$	Gate Emitter Threshold Voltage		5.0	5.8	6.5	V	
$V_{CE(sat)}$	Collector Emitter Saturation Voltage	chip	$I_C=300\text{A}, V_{GE}=15\text{V}, T_J=25^\circ\text{C}$		1.7		2.15
			$I_C=300\text{A}, V_{GE}=15\text{V}, T_J=125^\circ\text{C}$		2.0		
I_{CES}	Collector Leakage Current		$V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$		1	mA	
			$V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$		5		
I_{GES}	Gate Leakage Current		-400		400	nA	
R_{gint}	Integrated Gate Resistor			2.5		Ω	
Q_g	Gate Charge		$V_{CE}=600\text{V}, I_C=300\text{A}, V_{GE}=\pm 15\text{V}$			μC	
C_{ies}	Input Capacitance		$V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$			21	nF
C_{res}	Reverse Transfer Capacitance					1	nF
$t_{d(on)}$	Turn on Delay Time		$V_{CC}=600\text{V}, I_C=300\text{A}$ $R_G=2.4\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$	160	ns	
				$T_J=125^\circ\text{C}$	170	ns	
t_r	Rise Time		$V_{CC}=600\text{V}, I_C=300\text{A}$ $R_G=2.4\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$	45	ns	
				$T_J=125^\circ\text{C}$	50	ns	
$t_{d(off)}$	Turn off Delay Time		$V_{CC}=600\text{V}, I_C=300\text{A}$ $R_G=2.4\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$	460	ns	
				$T_J=125^\circ\text{C}$	530	ns	
t_f	Fall Time		$V_{CC}=600\text{V}, I_C=300\text{A}$ $R_G=2.4\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$	100	ns	
				$T_J=125^\circ\text{C}$	150	ns	
E_{on}	Turn on Energy		$V_{CC}=600\text{V}, I_C=300\text{A}$ $R_G=2.4\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$	13	mJ	
				$T_J=125^\circ\text{C}$	20	mJ	
E_{off}	Turn off Energy		$V_{CC}=600\text{V}, I_C=300\text{A}$ $R_G=2.4\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$	25	mJ	
				$T_J=125^\circ\text{C}$	37	mJ	
I_{sc}	Short Circuit Current		$t_{psc} \leq 10\mu\text{s}, V_{GE}=15\text{V}$ $T_J=125^\circ\text{C}, V_{CC}=900\text{V}$			A	
R_{thJC}	Junction to Case Thermal Resistance (Per IGBT)				0.09	K/W	

Diode-inverter

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
V_F	Forward Voltage	chip	$I_F=300\text{A}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$		1.65	2.15
			$I_F=300\text{A}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$		1.65	
t_{rr}	Reverse Recovery Time		$I_F=300\text{A}, V_R=600\text{V}$			ns
I_{RRM}	Max. Reverse Recovery Current		$dI_F/dt=-4800\text{A}/\mu\text{s}$			A
E_{rec}	Reverse Recovery Energy		$T_J=125^\circ\text{C}$			mJ
R_{thJCD}	Junction to Case Thermal Resistance (Per Diode)				0.16	K/W

NTC CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
R_{25}	Resistance		$T_C=25^\circ\text{C}$			K Ω
$B_{25/50}$	$R_2 = R_{25} \exp [B_{25/50}(1/T_2 - 1/(298.15 \text{ K}))]$			3375		K

MODULE CHARACTERISTICS

T_C=25°C unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
T _{Jmax}	Max. Junction Temperature		150	°C
T _{Jop}	Operating Temperature		-40~125	
T _{stg}	Storage Temperature		-40~125	
V _{isol}	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
CTI	Comparative Tracking Index		> 225	
Torque	to heatsink	Recommended (M5)	2.5~5	Nm
	to terminal	Recommended (M6)	3~5	Nm
Weight			350	g

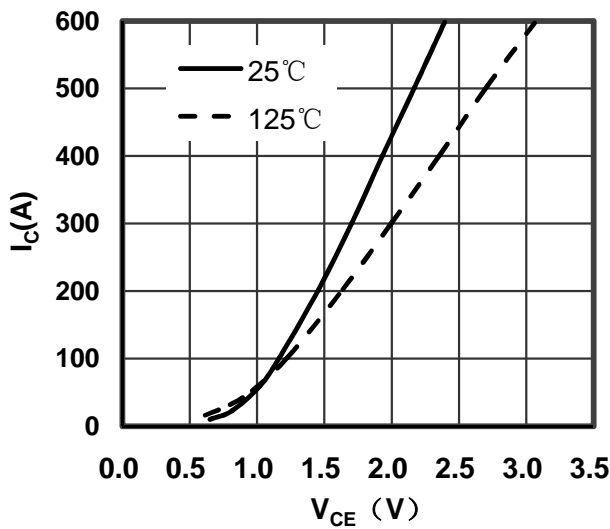


Figure 1. Typical Output Characteristics IGBT-inverter

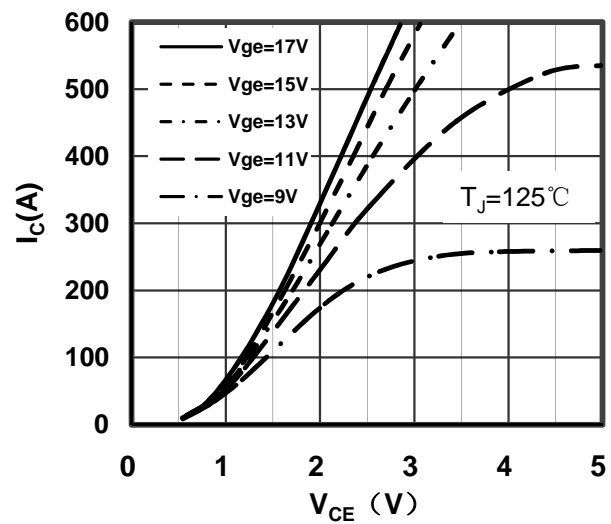


Figure 2. Typical Output Characteristics IGBT-inverter

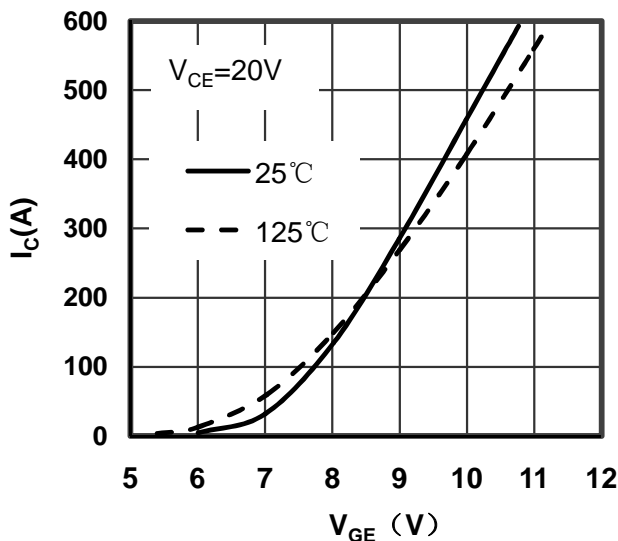


Figure 3. Typical Transfer characteristics IGBT-inverter

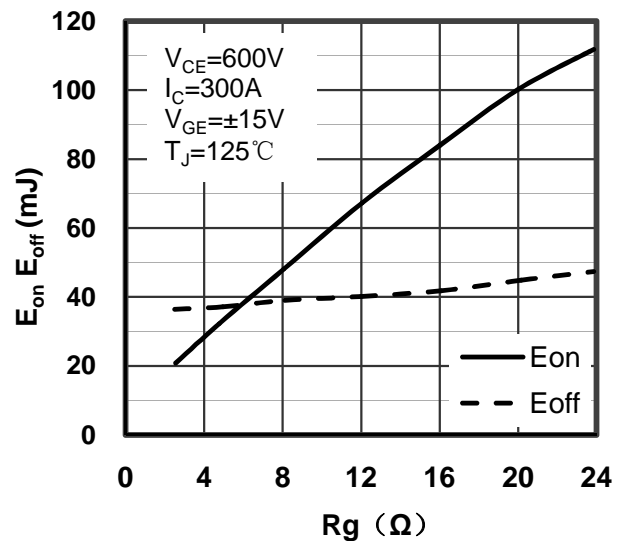


Figure 4. Switching Energy vs Gate Resistor IGBT-inverter

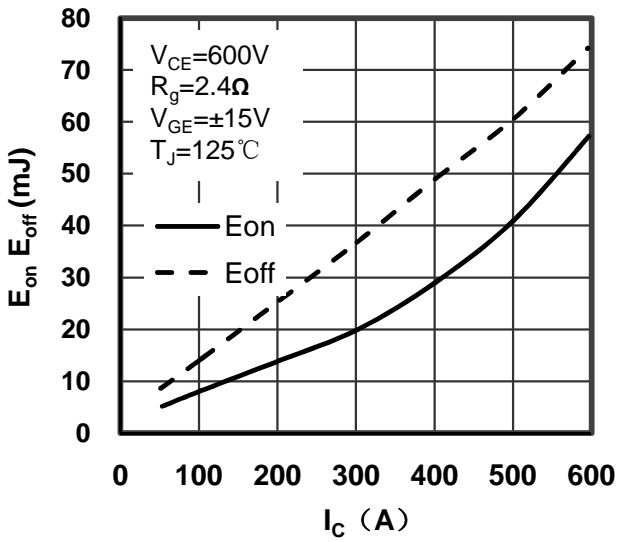


Figure 5. Switching Energy vs Collector Current IGBT-inverter

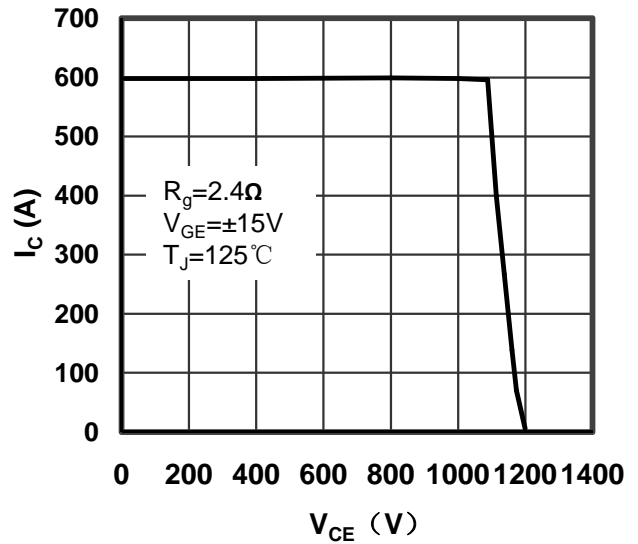


Figure 6. Reverse Biased Safe Operating Area IGBT-inverter

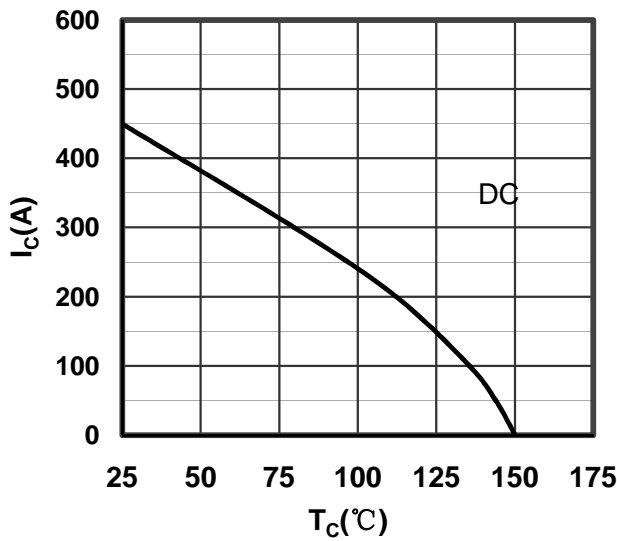


Figure 7. Collector Current vs Case temperature IGBT-inverter

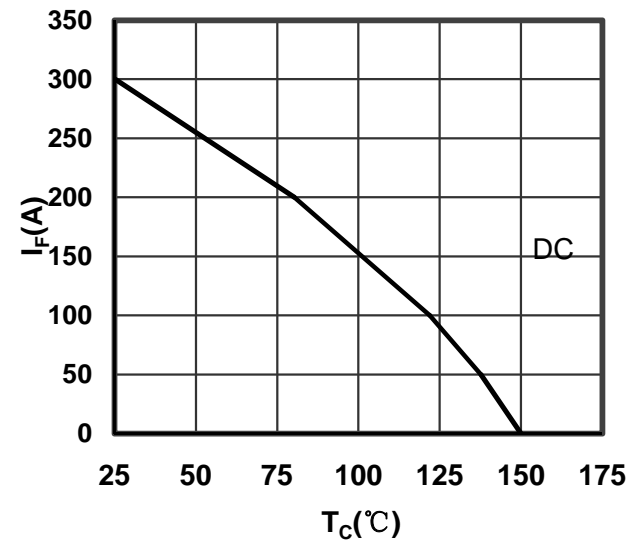


Figure 8. Forward current vs Case temperature Diode-inverter

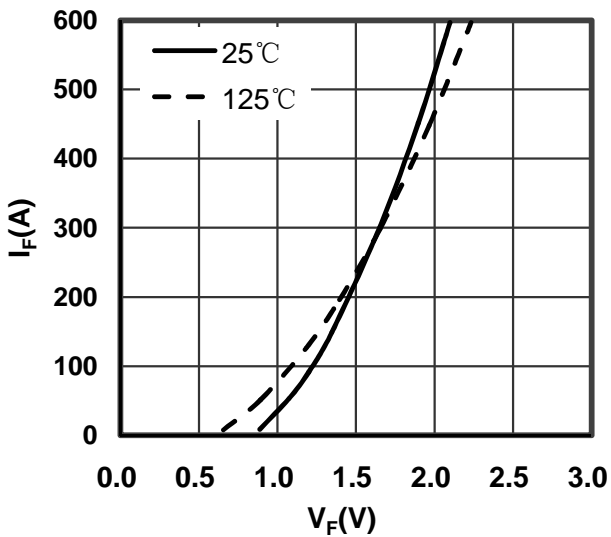


Figure 9. Diode Forward Characteristics Diode-inverter

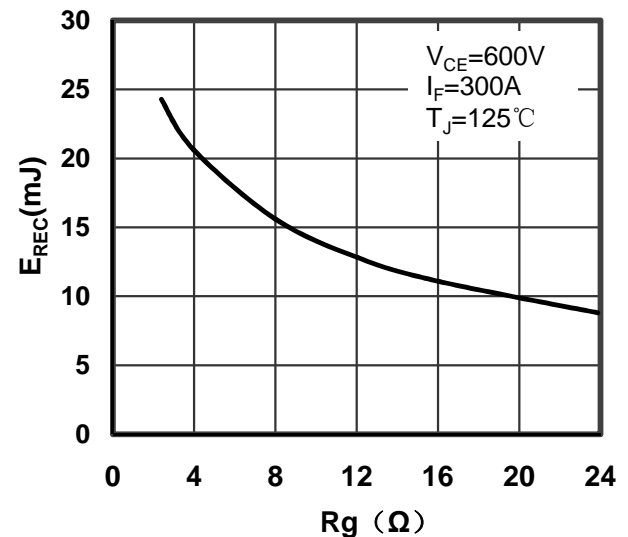


Figure 10. Switching Energy vs Gate Resistor Diode-inverter

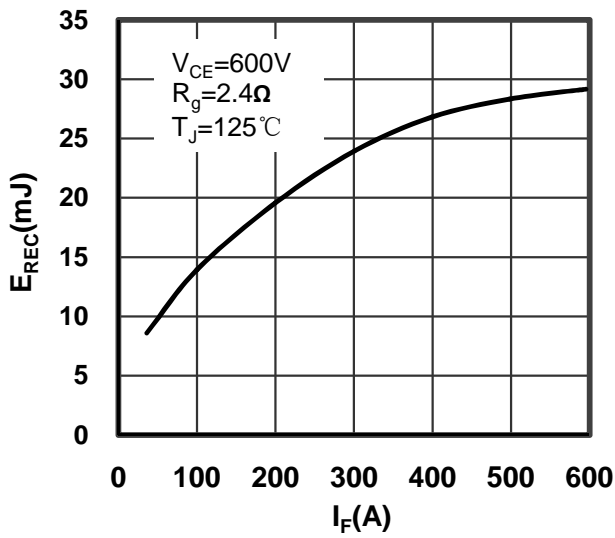


Figure 11. Switching Energy vs Forward Current Diode-inverter

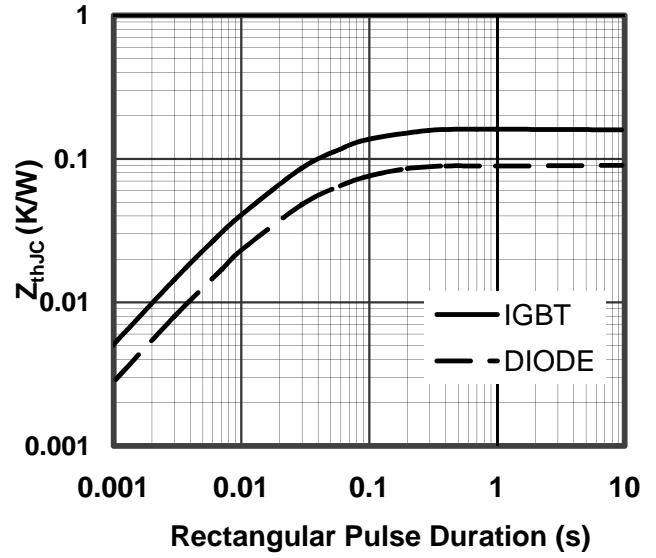


Figure 12. Transient Thermal Impedance of Diode and IGBT-inverter

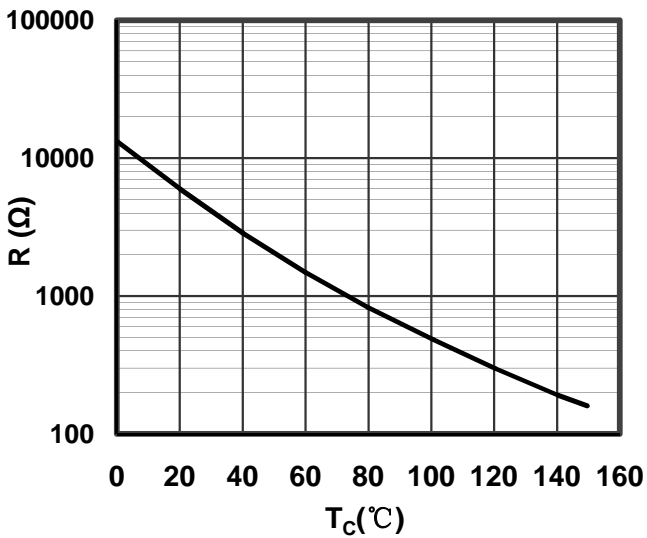


Figure 13. NTC Characteristics


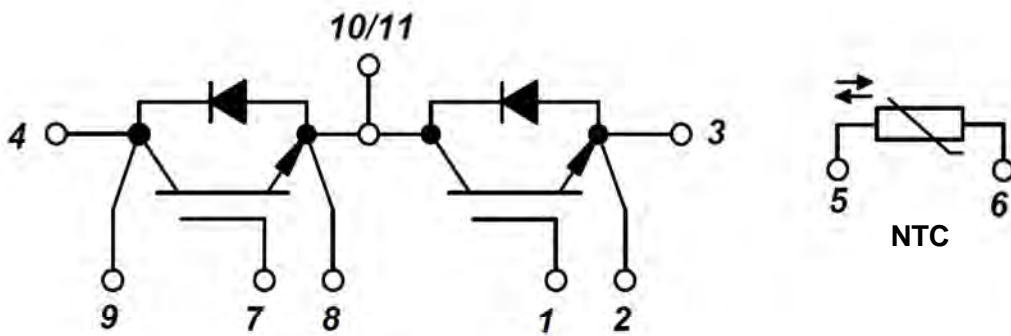


Figure 14. Circuit Diagram

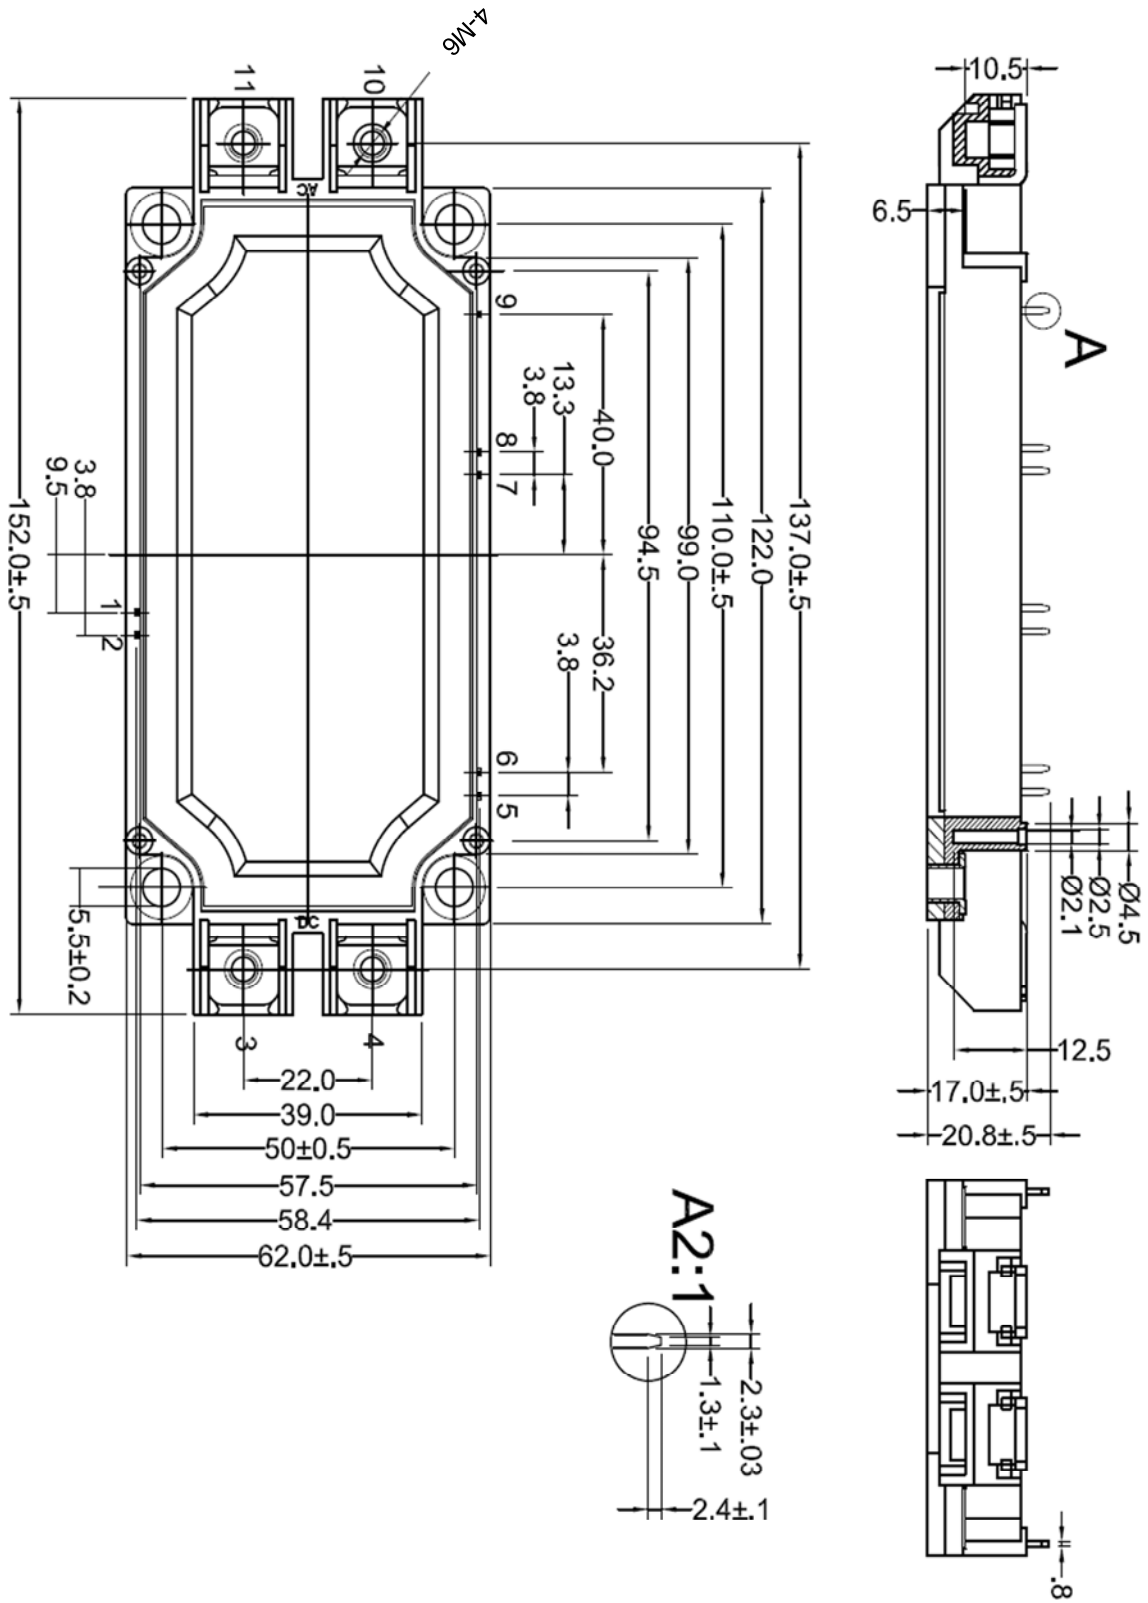

Dimensions in (mm)
Figure 15. Package Outline